

REVISION HISTORY					
REV	SHT	DESCRIPTION	DATE	ECN	CHECKED
A	ALL	RELEASE NEW	5/22/12	NEW	RBS

**NOTES: UNLESS OTHERWISE SPECIFIED.
SPECIFICATION & FUNCTION:**


- Five stripping functions in one convenient tool.
- Strips outer jackets from 2.0 - 2.4mm fiber, 2.8 - 3.0mm fiber and 2.0 - 3.0mm loose tube buffer tubes.
- Removes 900µm buffer from loose buffer without removing the acrylate coating.
- Strips buffer and acrylate from 900/125µm and 250/125µm
- Fiber factory set and calibrated cushioned locking handles provide an ergonomic grip and secured stripping application.
- A locking mechanism keeps the handles and blades safely closed when not in operation.

UNCONTROLLED COPY

FOST	TOOL, STRIPPER, FIBER, PROGRIP 5-1
OCC PART NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
TOLERANCES: FRACTIONS $\pm 1/32"$
 ANGLES $\pm 1/2^\circ$
3 PLACE DECIMALS $\pm .005"$
2 PLACE DECIMALS $\pm .01"$

THIS DRAWING AND THE DESIGN SHOWN ARE THE
PROPERTY OF OPTICAL CABLE CORPORATION AND
MAY NOT BE USED AS THE BASIS FOR MANUFACTURE
OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION
OF OPTICAL CABLE CORPORATION.

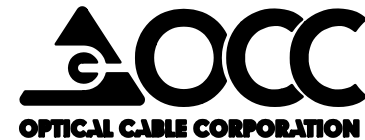

33 Superior Way
Swannanoa, NC 28778
Phone: 828-298-2260
Fax: 828-298-2487
www.occfiber.com

THIRD ANGLE PROJECTION	
CRITICAL DIMENSION CODE	FINISH SEE NOTES
(F) = FUNCTION	
(M) = MATING	
(A) = AUDIT	

MATERIAL SEE NOTES	
FINISH SEE NOTES	

DRAWN	D.A.HOLBERT	DATE	5/22/12
CHECKED	R.B.SMITH	DATE	5/23/12
ENGINEER	J.YANIK	DATE	5/22/12
APPROVED	J.HOWE	DATE	5/23/12
PREVIOUS DWG			
NEXT DWG		FILENAME	C111225A.DFT

DWG TITLE		TOOL, STRIPPER, FIBER, ERGONOMIC GRIP, 5-1	
SIZE	DWG NO.	REV	
A	C111225	A	
SCALE:	NONE	SHEET	1 OF 1