



**Twister® ProFLEX™ MAX  
Wire Connector**

**Model 348**

**FEATURES/BENEFITS:**



- Swept wing design provides extra leverage for maximum torque
- Wide range, expanding spring handles small combinations and expands to accommodate large combinations when you need it
- Copolymer shell expands for smooth, progressive tightening ensuring dependable connections
- Flexible skirt increases protection without requiring added space in tight boxes

**ELECTRICAL:**

Voltage Rating: 1000V maximum in building wire; 1000V maximum in fixtures and signs.

**PHYSICAL:**

Housing: Thermoplastic polypropylene with thermoplastic elastomer  
 Insert: Steel  
 Plating: Zinc  
 Temperature: 105°C (221°F)

**STANDARDS & SPECIFICATIONS:**


UL 486C  
 UL 94V-2 Flame retardant shell  
 cUL Listed to CSA C22.2 No. 188-8  
 RoHS Compliant

**WIRE RANGE:** – Solid and/orstranded wire combinations unless stated otherwise  
 – Consult websitefor other combinations not listed

Strip Length: 7/8" (22mm)

1 or 2 #6	2 #6 w/1 #14 or #12	1 #8 w/1 #12 w/1 to 4 #14	2 #8 w/2 #10 w/1 #14 sol
2 or 3 #8	1 #6 w/1 #12 w/1 to 4 #14	1 #8 w/2 #12 w/1 to 3 #14	1 #10 w/1 #12 w/1 to 4 #14
2 to 5 #10	1 #6 w/2 #12 w/1 to 3 #14	1 #8 w/3 #12 w/1 or 2 #14	1 #10 w/2 #12 w/1 to 3 #14
3 to 6 #12	1 #6 w/3 #12 w/1 or 2 #14	1 #8 w/4 #12 w/1 #14	1 #10 w/3 #12 w/1 or 2 #14
5 or 6 #14	1 #6 w/4 #12 w/1 #14	1 #8 w/1 #10 w/1 to 4 #14	1 #10 w/4 #12 w/1 #14
1 #8 w/1 to 5 #14 or #12	1 #6 w/1 #10 w/1 to 4 #14	1 #8 w/1 #10 w/1 to 4 #12	1 #10 w/2 to 4 #12
1 #8 w/1 to 4 #10	1 #6 w/1 #10 w/1 to 3 #12	1 #8 w/2 #10 w/1 to 3 #14	2 #10 w/1 #12 w/1 to 3 #14
1 #10 w/3 to 5 #14	1 #6 w/2 #10 w/1 or 2 #14	1 #8 w/2 #10 w/1 to 3 #12	2 #10 w/2 #12 w/1 or 2 #14
1 #12 w/4 or 5 #14	1 #6 w/2 #10 w/1 #12	1 #8 w/3 #10 w/1 or 2 #14	2 #10 w/3 #12 w/1 #14
2 #12 w/2 to 4 #14	1 #6 w/1 #8 w/1 to 3 #14	1 #8 w/3 #10 w/1 #12	2 #10 w/1 to 4 #14 or #12
3 #12 w/1 to 3 #14	1 #6 w/1 #8 w/1 or 2 #12	2 #8 w/1 #12 w/1 to 3 #14	3 #10 w/1 #12 w/1 or 2 #14
4 #12 w/1 #14	1 #6 w/1 #8 w/1 #10	2 #8 w/2 #12 w/1 or 2 #14	3 #10 w/2 #12 w/1 #14
1 #6 w/1 to 4 #14	2 #8 w/1 to 4 #14	2 #8 w/3 #12 w/1 #14	3 #10 w/1 to 3 #14
1 #6 w/1 to 5 #12	2 #8 w/1 to 3 #12	2 #8 w/1 #10 w/1 to 3 #14	3 #10 w/1 to 3 #12

**DIMENSIONS:**

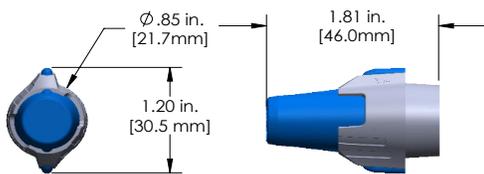

**ORDERING INFORMATION:**

Quantity	Part No.	Weight (lbs.)
Box of 25	<b>30-348</b>	0.5751
Jar of 150	<b>30-1348J</b>	3.5034

**FACTORY CONTACT:**

IDEAL INDUSTRIES, INC.  
 1800 S. PRAIRIE  
 SYCAMORE, IL 60178 P: (800) 435-0705  
 E: [contactus@idealindustries.com](mailto:contactus@idealindustries.com)  
 W: [idealind.com](http://idealind.com)

Revised: September 2024