

# IN-SURE® LEVER

## WIRE CONNECTORS



# IN-SURE® LEVER



## WIRE CONNECTORS

### Secure Connections Insert. Close. Connect.

Levered wire connectors provide the perfect solution for joining solid and stranded wires. These versatile connectors have a compact design that takes up minimal space in junction boxes and enclosures.

### Features:

- Secure, reliable and reusable
- Releasable connector for solid & stranded wires
- Modern alternative to traditional connectors
- Clear housing allows verification of connection
- Continuity check port and strip length guide
- Compact design for tight spaces
- For use with Cu/Cu combinations only
- Temperature 105°C max (221°F)
- Solid wires can be inserted without opening lever (models L22, L23 & L25)

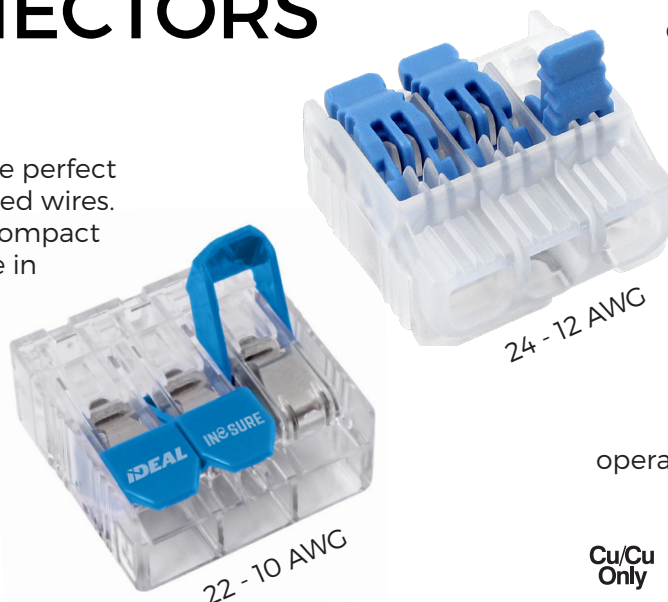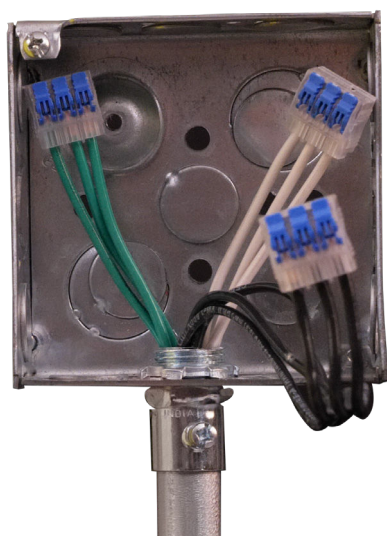

### SECURE CONNECTION

Optimized spring design for easy open and strong bite

### CONFIDENCE

Clear housing for visual inspection of work

### REUSABLE

Solid and stranded wire – tackle wide range of jobs

### EASE OF USE

Better grip, single lever operation for less stress on hands



| DESCRIPTION                                                                                       | PART #       | AMPS             | DETAILS                                                                                     |
|---------------------------------------------------------------------------------------------------|--------------|------------------|---------------------------------------------------------------------------------------------|
|  L22<br>2-Port  | Box of 150   | <b>30-10L22</b>  | 20A<br><br>600V*<br><br>Solid Copper:<br>24 - 12 AWG<br><br>Stranded Copper:<br>24 - 12 AWG |
|                                                                                                   | Jar of 500   | <b>30-50L22J</b> |                                                                                             |
|                                                                                                   | Box of 4,000 | <b>30-16L22</b>  |                                                                                             |
|  L23<br>3-Port | Box of 100   | <b>30-10L23</b>  |                                                                                             |
|                                                                                                   | Jar of 350   | <b>30-35L23J</b> |                                                                                             |
|                                                                                                   | Box of 2,500 | <b>30-16L23</b>  |                                                                                             |
|  L25<br>5-Port | Box of 75    | <b>30-10L25</b>  | 30A<br><br>600V*<br><br>Solid Copper:<br>22-10 AWG<br><br>Stranded Copper:<br>22-10 AWG     |
|                                                                                                   | Jar of 200   | <b>30-20L25J</b> |                                                                                             |
|                                                                                                   | Box of 1,500 | <b>30-16L25</b>  |                                                                                             |
|  L32<br>2-Port | Box of 100   | <b>30-10L32</b>  |                                                                                             |
|                                                                                                   | Jar of 350   | <b>30-35L32J</b> |                                                                                             |
|                                                                                                   | Box of 1,000 | <b>30-16L32</b>  |                                                                                             |
|  L33<br>3-Port | Box of 75    | <b>30-10L33</b>  |                                                                                             |
|                                                                                                   | Jar of 225   | <b>30-25L33J</b> |                                                                                             |
|                                                                                                   | Box of 1,000 | <b>30-16L33</b>  |                                                                                             |
|  L35<br>5-Port | Box of 50    | <b>30-10L35</b>  |                                                                                             |
|                                                                                                   | Jar of 125   | <b>30-15L35J</b> |                                                                                             |
|                                                                                                   | Box of 500   | <b>30-16L35</b>  |                                                                                             |

\*1,000V MAXIMUM IN FIXTURES AND SIGNS.  
COPPER-TO-COPPER ONLY. DO NOT USE ON ALUMINUM.

**WARNING:** Improper use or installation of this product may cause fire, electrocution, serious personal injury or death. Shut off power to the circuit or remove fuse before using this product. Use only connectors properly sized to the wiring being used. Consult local building codes for installation requirements.

P-6064 (10-24)  
©IDEAL INDUSTRIES, INC.

**IDEAL CUSTOMER SERVICE:**  
orderdesk@idealindustries.com  
1-800-824-3325  
idealind.com

