


**Part #: BX002DALS9KR**

**2 CHANNEL  
B-Series Breakout Riser Rated Cables**

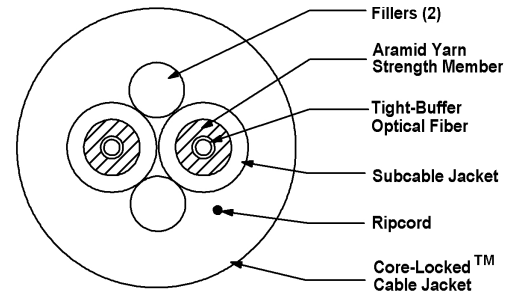

Laser Ultra-Fox™ Fiber Performance	
Fiber Code	ALS
Industry Standard Designation	Laser Grade OM2 ISO/IEC 11801
Core/Cladding Diameter (µm)	50/125
Numeric Aperture	0.20
Wavelength (nm)	850/1310
Gigabit Ethernet Distance (m)	600/600
10-Gigabit Ethernet Distance (m)	82/300
Maximum Cabled Attenuation (dB/km)	3.5/1.5
Minimum Laser EMB Bandwidth (MHz-km)	510/500
Minimum OFL LED Bandwidth (MHz-km)	500/500
Primary Coating Diameter (µm)	245
Secondary Buffer Diameter (µm)	900
Proof Test Level (kpsi)	100

Mechanical and Environmental	
Crush Resistance TIA/EIA-455-41A	
Operating Temperature	
Storage Temperature	


Cable Characteristics	
Jacket Color	Black
Jacket Material	Indoor / Outdoor PVC
Buffer Material	Hard Elastomeric
Subunit OD	2.5 mm
Cable Weight	41 kg/km (28 lbs/1000')
Cable Diameter	7.0 mm ( 0.28 in)

Installation and Operating Characteristics		
	Installation	Operating
Max Tensile Load	1,200 N (270 lbs)	500 N (110 lbs)
Min Bend Radius	10.5 cm (4.1 in)	7.0 cm (2.8 in)

## 2 CHANNEL

### B-Series Breakout Riser Rated Cables

Part #: **BX002DALS9KR**

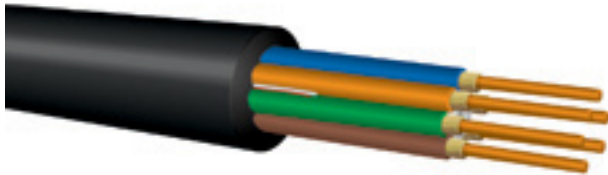

### Standards

Optical Cable Corporation indoor/outdoor tight buffered fiber optic cables meet the functional requirement of the following standards:

- UL 1651
- UL 1666
- GR-409-CORE
- ICEA-S-104-696
- ICEA-S-83-596
- TIA-568
- TIA-598

## Applications:

- Ideal for installations requiring an extremely rugged and reliable cable design where maximum mechanical and environmental protection are necessary
- Easiest cable to install where direct termination of the subcable to a connector and a direct run to panels and equipment are desired

## Cost Savings:

- Direct termination to subcable may eliminate the need for patch panels and patch cords and reduces connector loss
- 900  $\mu\text{m}$  buffer eliminates the need for costly and time-consuming installation of fanout kits or pigtail splices because connectors terminate directly to the subcable
- High crush resistance may eliminate the need for innerduct

## Features:

- High performance components and construction
- UL Listed in accordance with NEC sections 770.179(b) for use in vertical runs in building riser shafts or from floor to floor
- Most rugged and easy to install cable design for enterprise cabling applications
- Core-Locked™ outer jacket design for installation survivability and long-term, trouble free service
- Ideal for use in long, vertical installations
- 2.0mm subcables can be direct-terminated with standard connectors (2.5mm and 2.9mm subcables also available)
- Subcabled fiber is environmentally and mechanically protected
- Ideal for use in point-to-point runs in adverse environments
- Direct termination to subcable provides additional strain relief for better connector retention during moves, adds, and changes
- Design is ideal for direct pulling with mesh grips
- Cable materials are indoor/outdoor - UV, water and fungus resistant
- Wide operating temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- High performance 900  $\mu\text{m}$  tight-buffered coating on each optical fiber for environmental and mechanical protection
- Interlocking armor can be applied to cables as an alternative to conduit installation
- 2 to 72 fibers